

DETERMINATION OF THE LIQUID LIMIT OF A SOIL - AS1289.3.3.2 AND QDOT

VJ 0808 LIQUID LIMIT CONE PENETROMETER

Now specified in Britain as the preferred method of liquid limit determination. The Civilab unit is fitted with a digital dial gauge and is hand operated.



VJ 0808/9 ELECTRIC TIMER

The electric timer is a useful aid. Although not essential it is strongly recommended. The release time of five seconds has a tolerance of +/- one second.



Accessories:-

- VJ 0808CO Cone for penetrometer
- VJ 0808G Test gauge
- VJ 0808CU Penetration cup 55mm diameter x 55mm deep



LINEAR SHRINKAGE AS 1289.3.4.1

CL20210 SHRINKAGE TROUGH


Machined in brass 250mm x 25mm internal diameter. Chrome plated.

CL20206 SHRINKAGE TROUGH

Machined in brass 150mm QDOT specifications. Chrome plated.

CL20205 SHRINKAGE TROUGH

Machined in brass 125mm x 25mm internal diameter. Chrome plated.

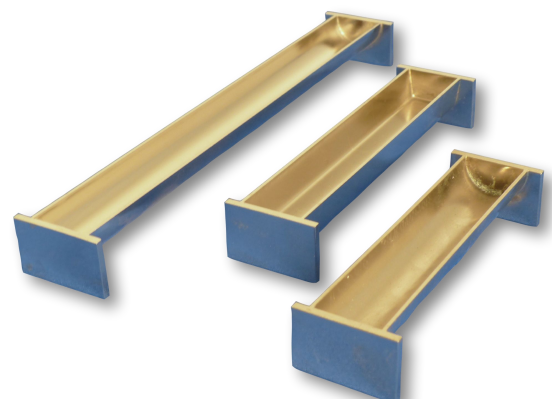

CL20210, CL20206, CL20205